

SG2500U

Turnkey Station for North America **1500 Vdc** System



High Yield

- Advanced three-level technology, max. efficiency 98.8%
- Effective cooling, 1.1 overload capacity, no derating up to 50 °C
- Max. DC/AC ratio more than 1.5



Easy O&M

- Low transportation and installation cost due to 10-foot container design
- DC 1500 V system, low system cost
- Integrated LV auxiliary power supply



Saved Investment


- Integrated current and voltage monitoring function for online analysis and fast trouble shooting
- Modular design, easy for maintenance
- Convenient external LCD




Grid Support

- Comply with UL 1741, UL 1741 SA, IEEE 1547, Rule 21 and NEC code
- Grid support including L/HVRT, L/HFRT, soft start/stop, specified power factor control and reactive power support

Circuit Diagram

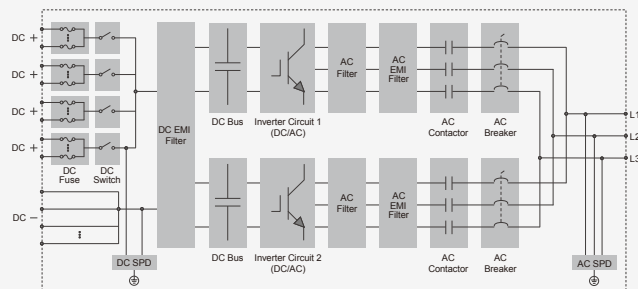

CEC Efficiency Curve

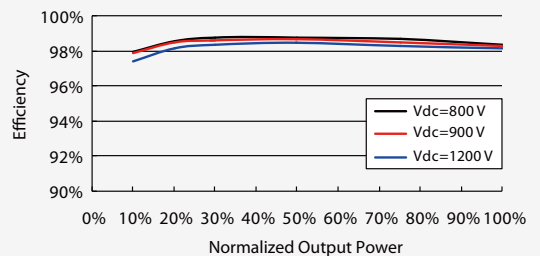

Input (DC)
SG2500U

Max. PV input voltage	1500V
Min. PV input voltage / Startup input voltage	800 V / 840 V
MPP voltage range for nominal power	800 – 1300 V
No. of independent MPP inputs	1
No. of DC inputs	18 – 28
Max. PV input current	3508 A
Max. DC short-circuit current	4210 A
PV array configuration	Negative grounding

Output (AC)

Nominal AC power (at 50 °C)	2500 kW
Max. AC output power at PF=1 (at 45 °C)	2750 kW
Max. AC apparent power (at 45 °C)	2750 kVA
Max. AC output current	2886 A
Nominal AC voltage	550 V
AC voltage range	495 - 605 V
Nominal grid frequency / Grid frequency range	50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz
THD	< 3 % (at nominal power)
DC current injection	< 0.5 % I _n
Power factor at nominal power / Adjustable power factor	> 0.99 / 0.8 leading – 0.8 lagging
Feed-in phases / Connection phases	3 / 3

Efficiency

Max. efficiency / CEC efficiency	98.8 % / 98.5 %
----------------------------------	-----------------

Protection

DC input protection	Load switch + fuse
AC output protection	Circuit breaker
Overvoltage protection	DC Type II / AC Type II
Grid monitoring / Ground fault monitoring	Yes / Yes
Insulation monitoring	Optional
Overheat protection	Yes

General Data

Dimensions (W*H*D)	2991*2896*2438 mm 117.8"*114.0"*96.0"
Weight	6.9 T 15211.9 lb
Isolation method	Transformerless
Degree of protection	NEMA 3R
Auxiliary power supply	220/110Vac, 5 kVA / Optional: 480 Vac, 30 kVA
Operating ambient temperature range	-30 to 60 °C (> 50 °C derating) -22 to 140 °F (> 122 °F derating)
Allowable relative humidity range (non-condensing)	0 – 95 %
Cooling method	Temperature controlled forced air cooling
Max. operating altitude	4000 m (> 2000 m derating) 13123 ft (> 6561 ft derating)
Display	Touch screen
Communication	Standard: RS485, Ethernet; Optional: optical fiber
Compliance	UL 1741, IEEE 1547, UL1741 SA, NEC Standard
Grid support	Night SVG function (optional), L/HVRT, L/HFRT, active & reactive power control and power ramp rate control

