


SG3150U-MV New

Turnkey Station for North America **1500 Vdc** System - MV Transformer Integrated

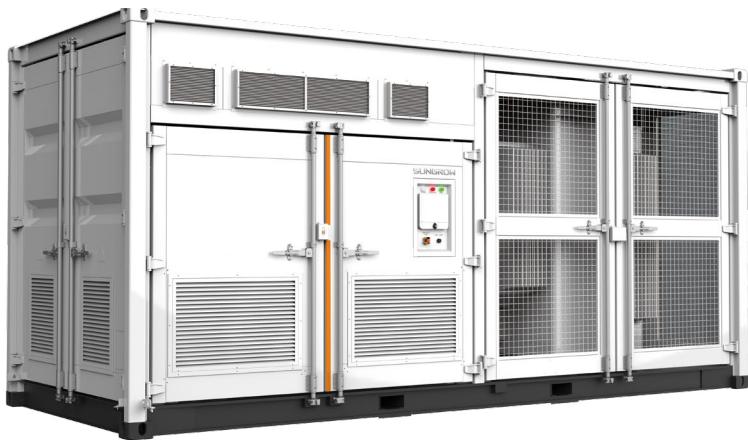

High Yield

- Advanced three-level technology, max. inverter efficiency 98.8%, inverter CEC efficiency 98.5 %
- Max. DC/AC ratio more than 1.5



Easy O&M

- Integrated current, voltage and MV parameters monitoring function for online analysis and fast trouble shooting
- Modular design, easy for maintenance
- Convenient external LCD



Saved Investment


- Low transportation and installation cost due to 20-foot container design
- 1500V DC system, low system cost
- Integrated MV transformer and LV auxiliary power supply




Grid Support

- Complies with UL 1741, UL 1741 SA, IEEE 1547, Rule 21 and NEC 2014/2017
- Grid support including L/HVRT, L/HFRT, active & reactive power control and power ramp rate control

Circuit Diagram

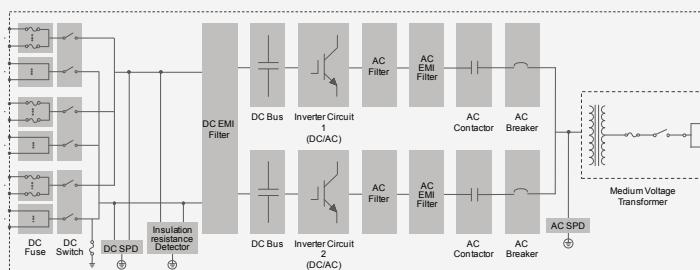

Inverter Efficiency Curve

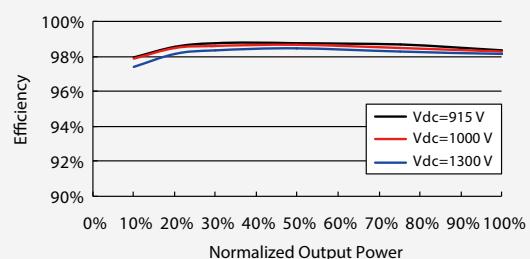

© 2019 Sungrow Power Supply Co., Ltd. All rights reserved.
Subject to change without notice. Version 1.0

Input (DC)		SG3150U-MV
Max. PV input voltage	1500V	
Min. PV input voltage / Startup input voltage	915 V / 955 V	
MPP voltage range for nominal power	940 – 1300 V	
No. of independent MPP inputs	1	
No. of DC inputs	18 – 24	
Max. PV input current	3420 A	
Max. DC short-circuit current	4800 A	
PV array configuration	Negative grounding	
Output (AC)		
AC output power	3150 kVA @ 45 °C (113 °F)	
Max. inverter output current	2886 A	
AC voltage range	34.5 kV	
Nominal grid frequency / Grid frequency range	60 Hz / 55 – 65 Hz	
THD	< 3 % (at nominal power)	
DC current injection	< 0.5 % In	
Power factor at nominal power / Adjustable power factor	> 0.99 / 0.8 leading – 0.8 lagging	
Feed-in phases / Connection phases	3 / 3	
Efficiency		
Inverter max. efficiency / Inverter CEC efficiency	98.8 % / 98.5 %	
Transformer		
Transformer rated power	3150 kVA	
Transformer max. power	3150 kVA	
LV / MV voltage	0.63 kV / 34.5 kV	
Transformer vector	Dy1	
Transformer cooling type	ONAN (Oil Natural Air Natural)	
Oil type	Mineral oil (PCB free) or degradable oil on request	
Protection		
DC input protection	Load break switch + fuse	
Inverter output protection	Circuit breaker	
AC MV output protection	Load break switch + fuse	
Overvoltage protection	DC Type II / AC Type II	
Grid monitoring / Ground fault monitoring	Yes / Yes	
Insulation monitoring	Optional	
Overheat protection	Yes	
General Data		
Dimensions (W*H*D)	6058*2896*2438 mm (238.5**114.0**96.0")	
Weight	18 T (39683.2 lbs)	
Degree of protection	NEMA 3R	
Auxiliary power supply	120 Vac, 5 kVA / Optional: 480 Vac, 30 kVA	
Operating ambient temperature range	-30 to 60 °C (> 45 °C derating) (-22 to 140 °F (> 113 °F derating))	
Allowable relative humidity range (non-condensing)	0 – 95 %	
Cooling method	Temperature controlled forced air cooling	
Max. operating altitude	1000 m (standard) / > 1000 m (optional) (3280.8 ft (standard) / > 3280.8 ft (optional))	
Display	Touch screen	
Communication	Standard: RS485, Ethernet; Optional: optical fiber	
Compliance	UL 1741, IEEE 1547, UL1741 SA, NEC 2014/2017, CSA C22.2 No.107.1-01	
Grid support	Q at night function (optional), L/HVRT, L/HVRT, active & reactive power control and power ramp rate control, Volt-var, Frequency-watt	